

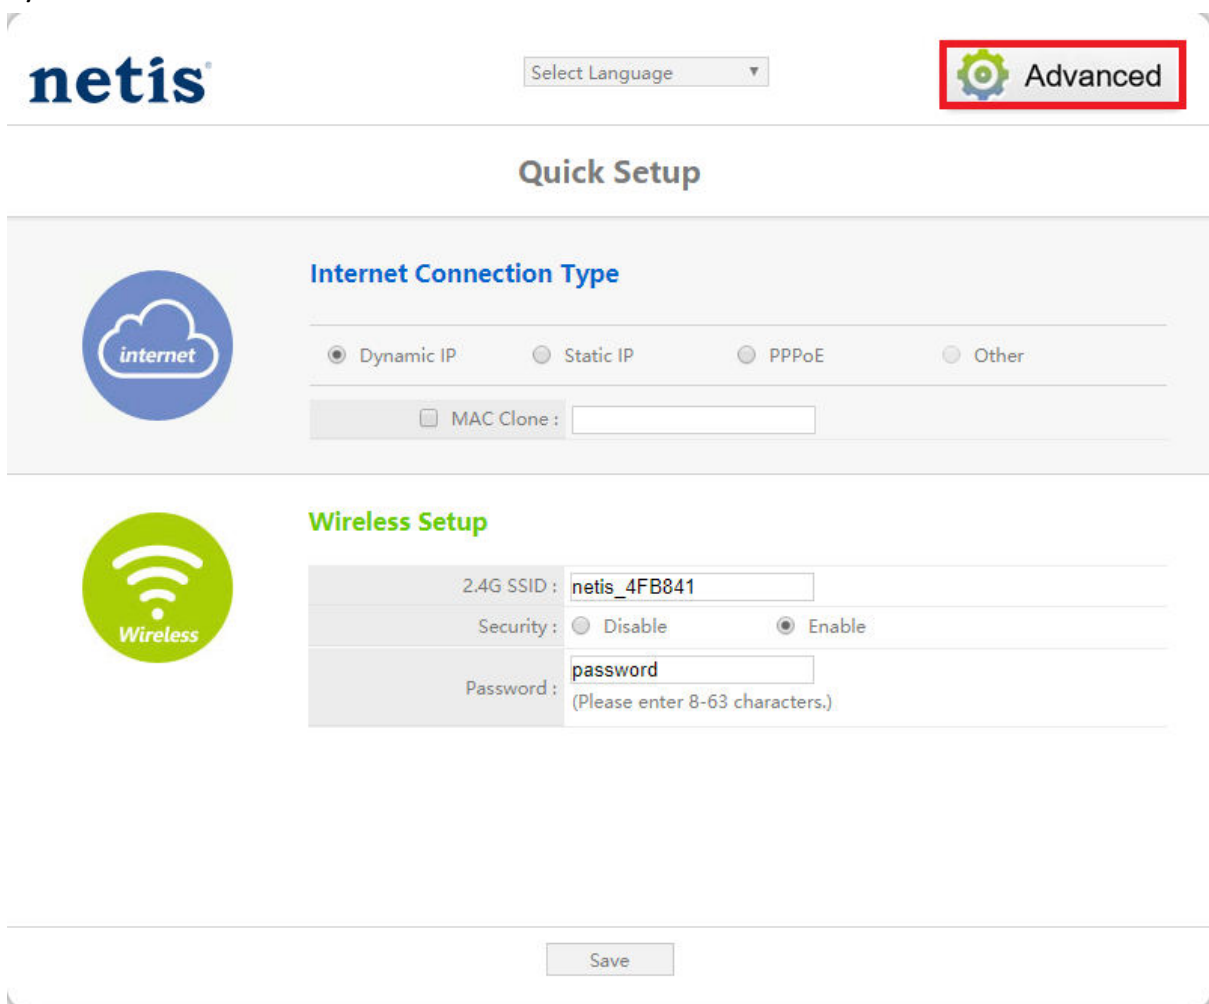
# Návod na nastavení routru Netis

- 1) Na druhé straně routru je restartovací tlačítko (podržet cca 10 sekund)
- 2) Router připojíme k počítači síťovým kabelem do černého portu (né do modrého)
- 3) V internetovém prohlížeči zadáme 192.168.1.1

1/



2/

A screenshot of the Netis router configuration page. The page is titled "netis" and has a "Select Language" dropdown menu. A red box highlights the "Advanced" settings icon. The "Quick Setup" section is visible, showing the "Internet Connection Type" and "Wireless Setup" options. The "Internet Connection Type" section has radio buttons for "Dynamic IP", "Static IP", "PPPoE", and "Other". The "Wireless Setup" section has fields for "2.4G SSID" (netis\_4FB841), "Security" (Disable/Enable), and "Password" (password). A "Save" button is at the bottom.

3/

The screenshot shows the Netis WF2411 router configuration interface. The 'Network' menu is highlighted in red, and the 'WAN' sub-menu is selected. The 'WAN Type' is set to 'Wired'. The 'WAN Settings' section shows the 'WAN Connection Type' dropdown menu open, with 'Static IP' selected. The dropdown menu lists the following options: Dynamic IP (DHCP), Static IP, PPPoE, Russia PPPoE, Unifi PPPoE, Maxis PPPoE, PPTP/Russia PPTP, and L2TP/Russia L2TP. The 'Quick Setup' button is visible in the top right corner, and the version number 'V2.1.36123' is displayed in the bottom right corner.

4/

The screenshot shows the Netis WF2411 router configuration interface. The 'WAN Settings' section is expanded, showing the 'WAN Connection Type' set to 'Static IP'. The 'WAN IP Address' field is empty. The 'Subnet Mask' field is empty. The 'Default Gateway' field is empty. The 'Primary DNS' field is set to '185.73.162.2'. The 'Secondary DNS' field is set to '212.4.158.68' (Optional). The 'Save' and 'Advanced' buttons are visible at the bottom of the settings section. The 'Quick Setup' button is visible in the top right corner, and the version number 'V2.1.36123' is displayed in the bottom right corner.

WAN IP Adress – zadáte svojí IP adresu

Subnet mask –

Default Gateway –

Primary DNS – 185.73.162.2

Secondary DNS – 212.4.158.68

netis® Quick Setup

WF2411 V2.1.36123

- Status
- Network
  - Wireless 2.4G
    - Wireless Settings
    - MAC Filtering
    - WPS Setting
    - Multiple SSID
    - Wireless Advanced
    - Wireless Client List
  - Bandwidth Control
- Forwarding
- Access Control
- Dynamic DNS
- Advanced
- System Tools

### Wireless Settings

Wireless Status :  Enable  Disable

MAC Address : 04:8d:39:4f:b8:41

Radio Mode : Access Point

Radio Band : 802.11b+g+n

SSID : SIT

SSID Broadcast :  Enable  Disable

Region : EU

Channel : Auto

Channel Width :  20MHz  40MHz  20/40MHz

Control Sideband :  Lower  Upper

### AP Security Settings

For the best security of your wireless network, we strongly recommend you to set WPA2-PSK as Authentication Type, and AES or TKIP & AES as Encryption Type.

Authentication Type : WPA/WPA2-PSK

Encryption Type :  TKIP & AES

Key Mode :  HEX  ASCII

Password : 0123456789

(Please enter 8-63 ASCII characters (any combination of a-z, A-Z, 0-9.))

## WI-FI

SSID – Zadáte svůj název sítě (jak chcete aby se síť jmenovala)

Password – nastavíte své heslo které budete potřebovat k přihlášení na

Wi-Fi

Save

6/

netis®

Quick Setup

WF2411

Remote Management

Status :  Enable  Disable

Port :

Save

V2.1.36123

- Status
- Network
- Wireless 2.4G
- Bandwidth Control
- Forwarding
- Access Control
- Dynamic DNS
- Advanced
- System Tools**
  - Firmware Upgrade
  - Backup & Restore
  - Diagnostic Tools
  - Remote Management**
  - Time Settings
  - Password
  - Statistics
  - System Log
  - System Restart
  - Factory Defaults

Select Language ▼

Remote management – je potřeba přepnout Status na enable a přepsat port na 80  
Save

7/

The screenshot shows the Netis WF2411 web interface. The top left features the 'netis' logo and the model number 'WF2411'. The top right has a 'Quick Setup' button and the version number 'V2.1.36123'. A sidebar menu on the left lists various settings, with 'System Tools' and 'Password' highlighted in red. The main content area is titled 'Password' and contains the following fields:

Username :	
Current Password :	<input type="password"/> (Please enter characters: a-z,A-Z,0-9.)
New Username :	admin (Please enter characters: a-z,A-Z,0-9.)
New Password :	..... (Please enter characters: a-z,A-Z,0-9.)
Confirm New Password :	..... (Please enter characters: a-z,A-Z,0-9.)

At the bottom of the form is a 'Save' button.

Password – New Username: admin

New Password: datonet

Confirm New Password: Datonet

Save