


Návod nastavení routru TP-Link

- 1) Na druhé straně routru je restartovací tlačítko (podržet cca 10 sekund)
- 2) Router připojíme k počítači síťovým kabelem do žlutého portu (né do modrého)
- 3) V internetovém prohlížeči zadáme 192.168.0.1

1/



2/

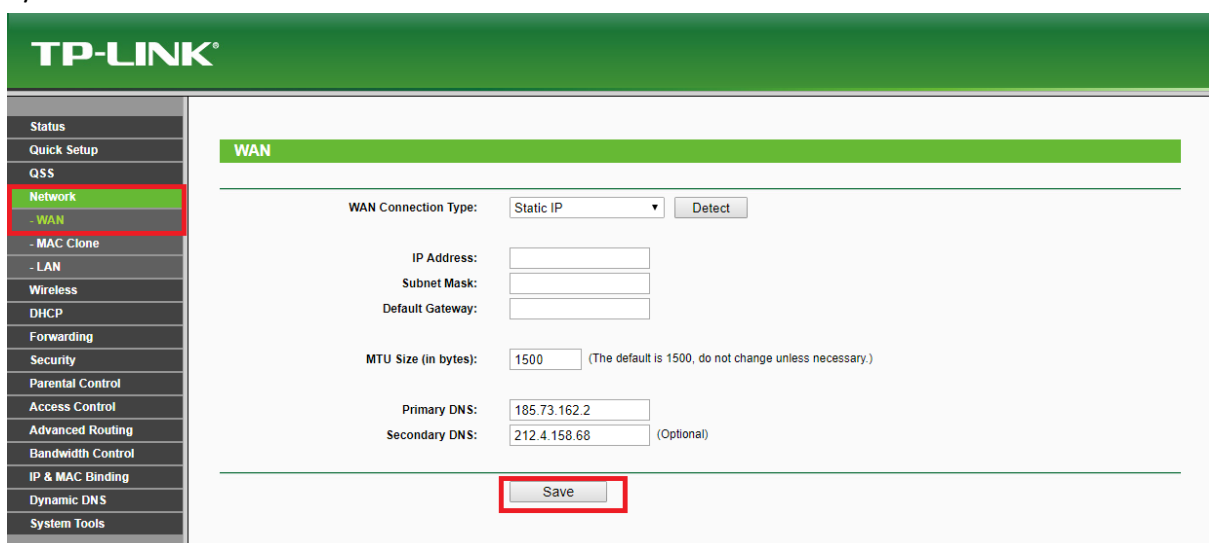

IP Address – Nastavíte svojí IP adresu


Subnet Mask –

Default Gateway –

Primary DSN – 185.73.162.2

Secondary DSN – 212.4.158.68

3/

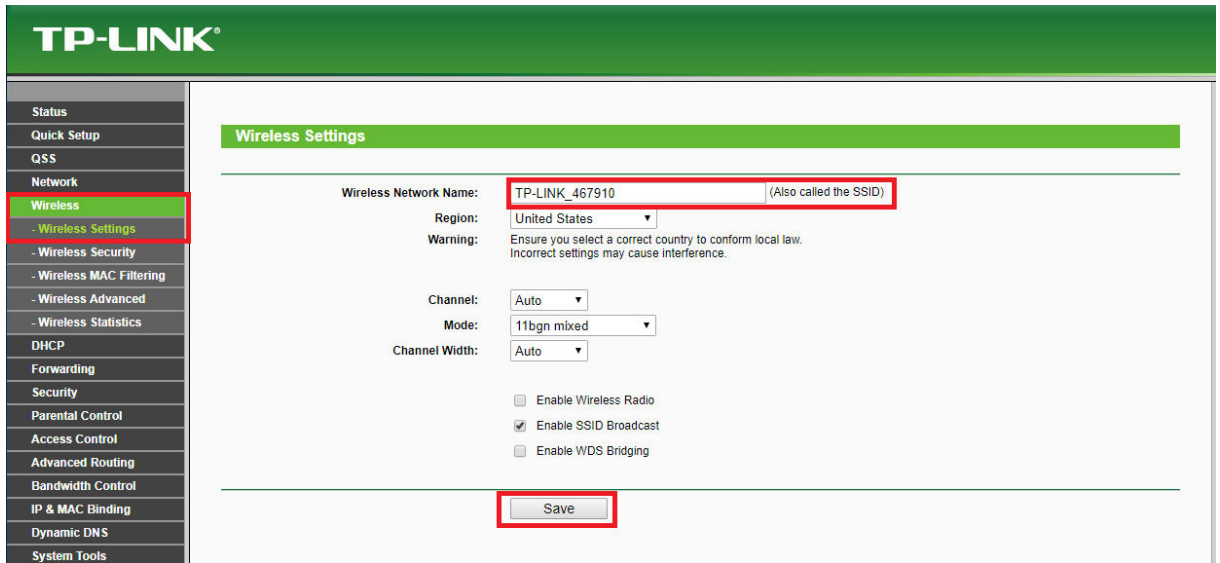


The screenshot shows the TP-LINK web interface for Wireless Settings. The left sidebar has a menu with 'Wireless' selected. The main content area is titled 'Wireless Settings' and contains the following fields:

- Wireless Network Name: TP-LINK_467910 (Also called the SSID)
- Region: United States
- Warning: Ensure you select a correct country to conform local law. Incorrect settings may cause interference.
- Channel: Auto
- Mode: 11bgn mixed
- Channel Width: Auto
- Enable Wireless Radio:
- Enable SSID Broadcast:
- Enable WDS Bridging:
- Save button

Wi-Fi

Wireless Network Name – nastavíte název sítě pro Wi-Fi

4/

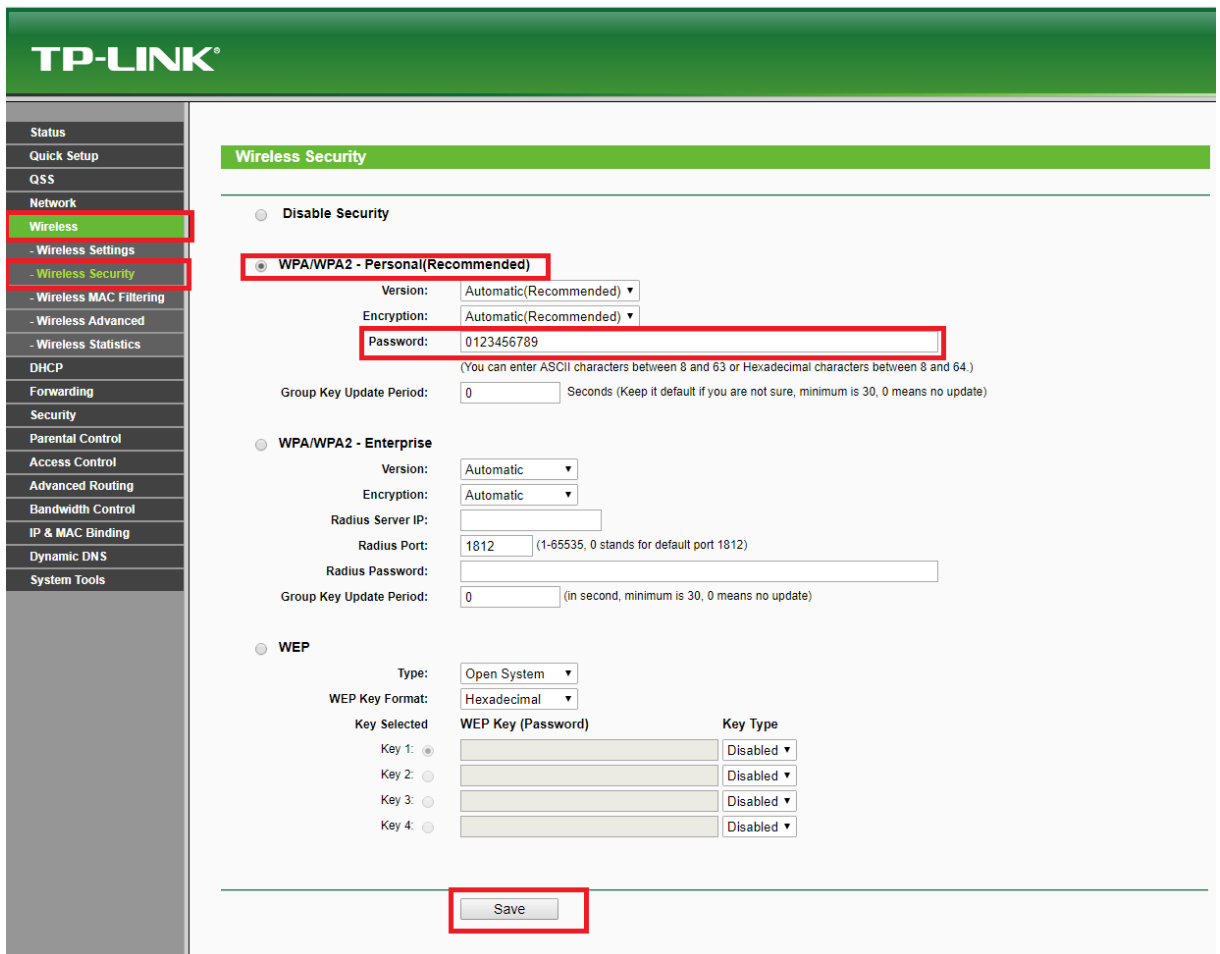

The screenshot shows the TP-LINK web interface for Wireless Security. The left sidebar has a menu with 'Wireless' selected, and 'Wireless Security' is highlighted. The main content area is titled 'Wireless Security' and contains the following options and fields:

- Disable Security:
- WPA/WPA2 - Personal(Recommended):
 - Version: Automatic(Recommended)
 - Encryption: Automatic(Recommended)
 - Password: 0123456789
 - Group Key Update Period: 0 Seconds (Keep it default if you are not sure, minimum is 30, 0 means no update)
- WPA/WPA2 - Enterprise:
 - Version: Automatic
 - Encryption: Automatic
 - Radius Server IP: [empty]
 - Radius Port: 1812 (1-65535, 0 stands for default port 1812)
 - Radius Password: [empty]
 - Group Key Update Period: 0 (in second, minimum is 30, 0 means no update)
- WEP:
 - Type: Open System
 - WEP Key Format: Hexadecimal
 - Key Selected: Key 1, Key 2, Key 3, Key 4
 - WEP Key (Password): [empty]
 - Key Type: Disabled
- Save button

Password – nastavíte heslo pro Wi-Fi které budete potřebovat k přihlášení

5/

The screenshot shows the TP-LINK web management interface. The left sidebar contains a menu with the following items: Status, Quick Setup, QSS, Network, Wireless, DHCP, Forwarding, Security (highlighted in green), - Basic Security, - Advanced Security, - Local Management, - Remote Management (highlighted in red), Parental Control, Access Control, Advanced Routing, Bandwidth Control, IP & MAC Binding, Dynamic DNS, and System Tools. The main content area is titled "Remote Management" and contains the following fields: "Web Management Port:" with a text box containing "80", and "Remote Management IP Address:" with a text box and a note "(Enter 255.255.255.255 for all)". A "Save" button is located below the fields.

Web Management Port – změňte na 80

6/

The screenshot shows the TP-LINK web management interface. The left sidebar contains a menu with the following items: Status, Quick Setup, QSS, Network, Wireless, DHCP, Forwarding, Security, Parental Control, Access Control, Advanced Routing, Bandwidth Control, IP & MAC Binding, Dynamic DNS, System Tools (highlighted in green), - Time Settings, - Diagnostic, - Firmware Upgrade, - Factory Defaults, - Backup & Restore, - Reboot, - Password (highlighted in red), - System Log, and - Statistics. The main content area is titled "Password" and contains a warning message: "The username and password must not exceed 14 characters in length and must not include any spaces!". Below the warning are four fields: "Old User Name:" with a text box containing "admin", "Old Password:" with a text box containing "*****", "New User Name:" with a text box containing "admin", "New Password:" with a text box containing "*****", and "Confirm New Password:" with a text box containing "*****". A "Save" button and a "Clear All" button are located below the fields.

Old User Name – admin

Old Password – admin

New User Name – admin

New Password – datonet

Confirm New Password – datonet